

# Scopemon User Interface


*The user interface of Scopemon displays results and provides some adjustments for the ongoing the measurement.*


## Table of Contents

1. Overview .....	3
2. Main Window .....	3
2.1. Warnings .....	4
3. Control Panel Window .....	4
3.1. Log Page .....	5
3.2. Settings Page .....	5
3.3. About Page .....	6

# 1. Overview

The default interface of Qosium Scopemon consists of 2 windows: *Main window* and *Control Panel window*. The main window is primarily used to monitor the ongoing measurement, while the control panel window hosts the log, measurement on/off toggle, and information about the Scopemon version.

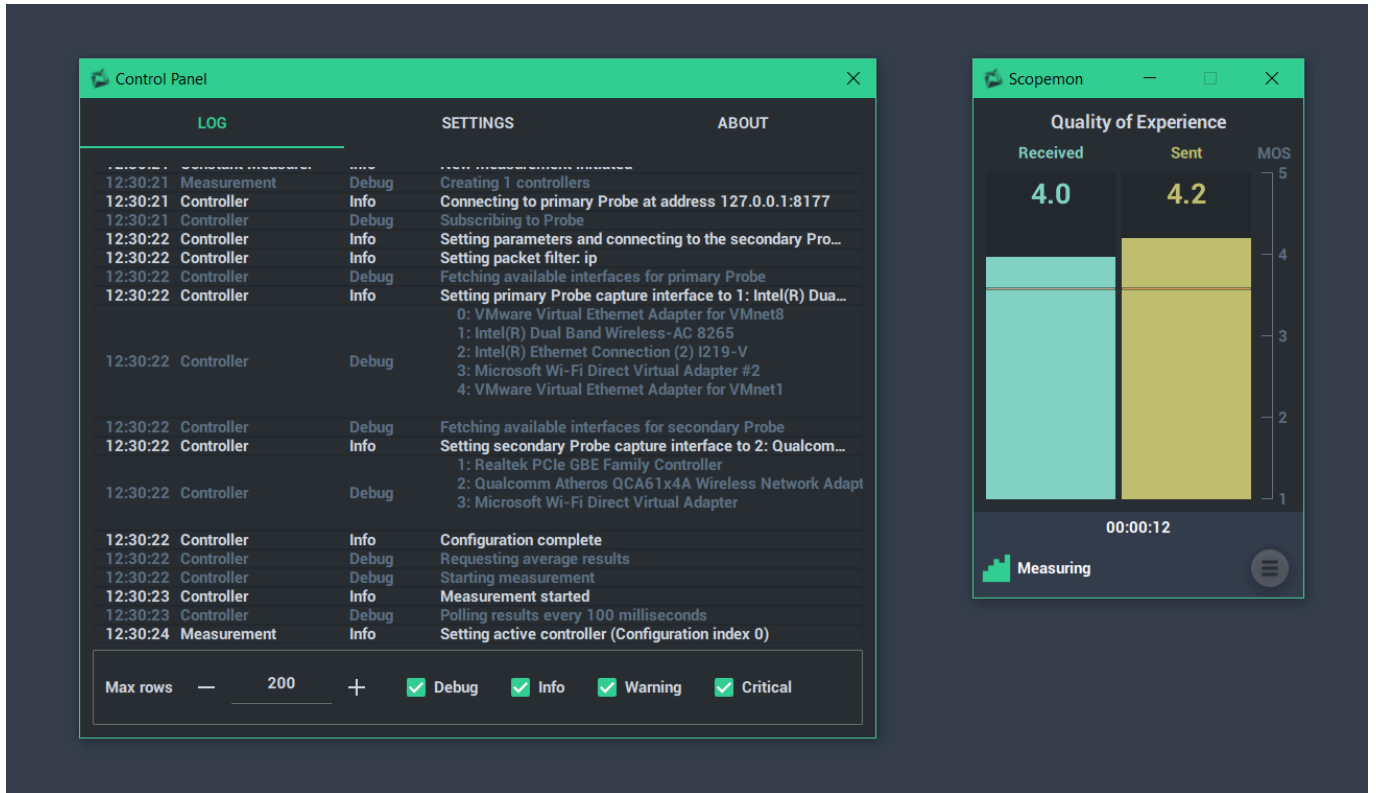


 The user interface of Scopemon is highly customizable. Therefore, your distribution of Scopemon may have a different appearance, but the basic functionality is nonetheless the same.

# 2. Main Window

The main window of Qosium Scopemon consists of two elements:


1. **Charts** (top) - One or more charts that visualize given measurement results
2. **Toolbar** (bottom) - This panel displays current measurement duration and status. The menu button shows/hides the *Control Panel Window*

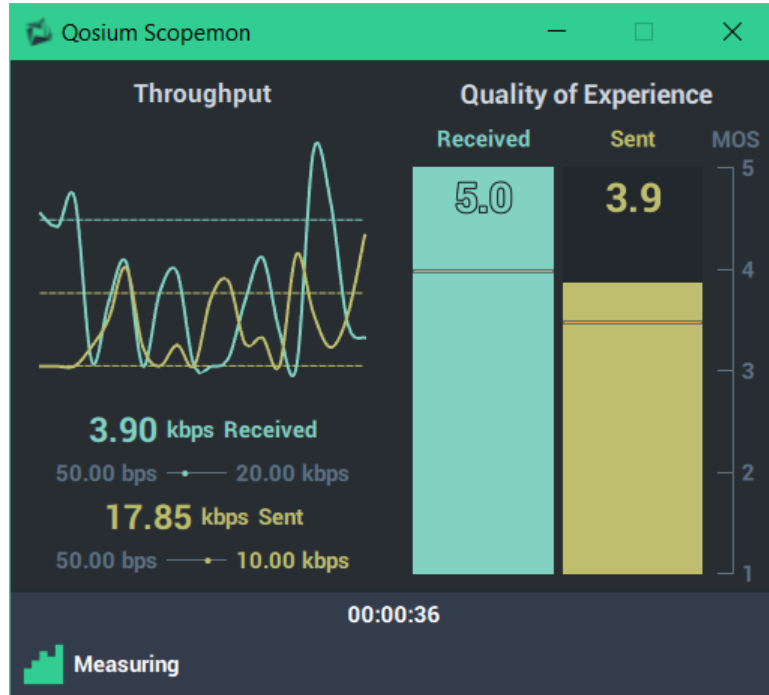

## 2.1. Warnings

Scopemon displays some warnings in the main window. These types of warnings usually require user action, be it a misconfiguration or a non-responsive Probe. If Scopemon can deduce that the warning has outlived its usefulness, it will be removed from this list. Some warnings, such as configuration errors, persist until Scopemon is restarted.

Scopemon displays an icon at the bottom of the window (orange exclamation mark inside a triangle) in case of one or more active warnings. Hover over the icon to see the warnings:

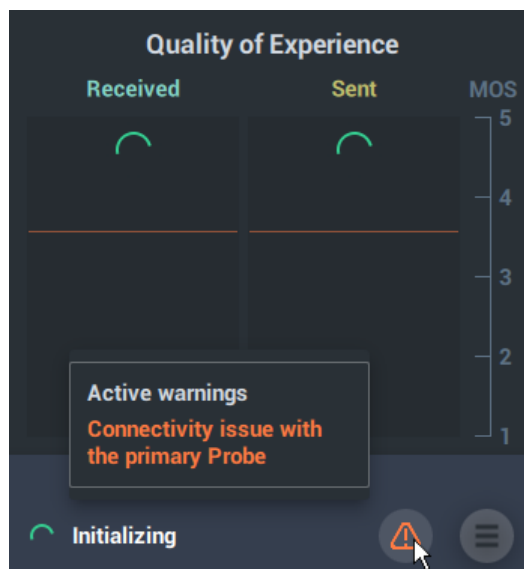

## 3. Control Panel Window

The control panel provides a few pages with miscellaneous purposes. See each page in the following section for more information.

### 3.1. Log Page

The log page displays a list of events. It reports errors, warnings, and other anomalies in the operation of Scopemon.

The screenshot shows the Scopemon Log Page interface. It has three tabs: LOG, SETTINGS, and ABOUT. The LOG tab is active, displaying a list of log entries. The entries are as follows:

Time	Source	Level	Message
12:10:08	Core	Info	Application version: 1.5.5.0
12:10:08	Core	Info	QMCP version: 1.11.16.13
12:10:08	Application	Info	Using constant measurer
12:10:08	Constant Measurer	Info	New measurement initiated
12:10:08	Measurement	Debug	Creating 1 controllers
12:10:08	Controller	Info	Connecting to primary Probe at address 127.0.0.1:8177
12:10:08	Controller	Debug	Subscribing to Probe
12:10:08	Controller	Info	Setting parameters
12:10:08	Controller	Info	Setting packet filter: ip
12:10:08	Controller	Debug	Fetching available interfaces for primary Probe
12:10:09	Controller	Info	Setting primary Probe capture interface to 0: VMware Virtual Ethernet Adapter for VMnet8
			0: VMware Virtual Ethernet Adapter for VMnet8
			1: Intel(R) Dual Band Wireless-AC 8265
			2: Intel(R) Ethernet Connection (2) I219-V
			3: Microsoft Wi-Fi Direct Virtual Adapter #2
			4: VMware Virtual Ethernet Adapter for VMnet1
12:10:09	Controller	Debug	
12:10:09	Controller	Info	Configuration complete
12:10:09	Controller	Debug	Requesting average results
12:10:09	Controller	Debug	Starting measurement
12:10:09	Controller	Info	Measurement started
12:10:09	Controller	Debug	Polling results every 100 milliseconds
12:10:10	Measurement	Info	Setting active controller (Configuration index 0)

At the bottom of the log page, there is a settings bar with the following options:


- Max rows: 200
- Debug:
- Info:
- Warning:
- Critical:

This page has a few settings available:

- **Max rows** - The maximum number of log messages Scopemon will keep in memory
- **Debug** - Show/Hide *Debug*-class messages
- **Info** - Show/Hide *Info*-class messages
- **Warning** - Show/Hide *Warning*-class messages
- **Critical** - Show/Hide *Critical*-class messages

### 3.2. Settings Page

On the settings page, the measurement can be turned on/off without closing Scopemon. To learn how to adjust Scopemon settings, see [Scopemon Configuration](#).

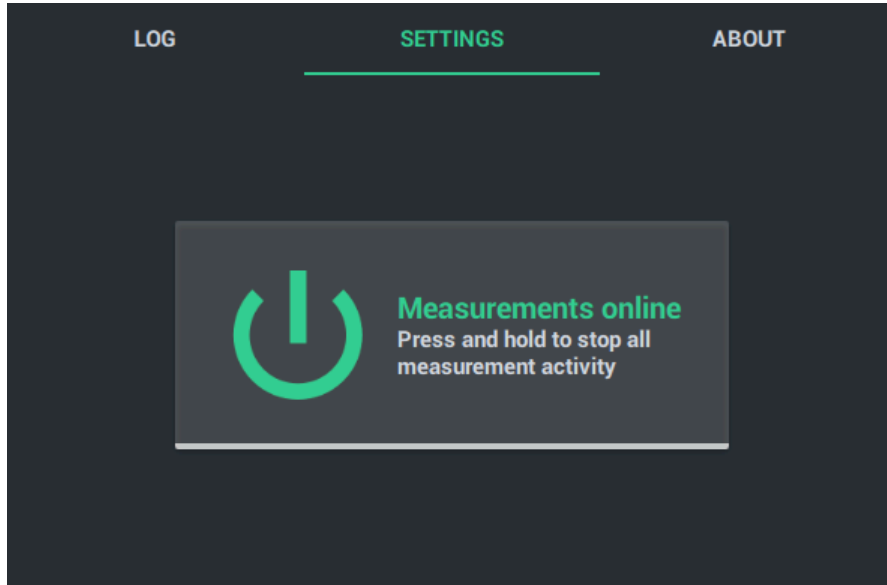

Using this functionality does not reload the settings from the configuration file. To reload, restart Scopemon instead.


### 3.3. About Page

The about page displays technical information about Scopemon, such as version information and additional license clauses.


LOG                      SETTINGS                      **ABOUT**

---

Technical Information



Qosium Scopemon  
©2020 Kaitotek Oy  
Software version: 1.5.5.0  
QMCP version: 1.11.16.13



LGPLv3 Clause

This software uses components of Qt under LGPLv3 open source license. Qt is a C++ toolkit for cross-platform application development.

As an end user of this software, you have the following rights under the LGPLv3 license. Please contact us for further instructions.

- Re-link this application against a modified version of the Qt library
- Acquire the source code of the Qt library this software is linked to

For full LGPLv3 license, view the license file in the installation directory of this software, or visit [gnu.org/licenses/lgpl-3.0.en.html](http://gnu.org/licenses/lgpl-3.0.en.html).

For more information on Qt, visit [qt.io](http://qt.io).

For contacting us, send email at [support@kaitotek.com](mailto:support@kaitotek.com), or visit our website for more contact options at [kaitotek.com](http://kaitotek.com).